

Surface Mount, Multi Layer High Frequency Ceramic Inductor



MECHANICAL SPECIFICATIONS

Solderability: 90 % coverage after 5 s dip in 235 °C solder following 60 s preheat at 120 °C and type R flux dip

Resistance to Solder Heat: 10 s in 260 °C solder, after preheat and flux above.

Termination: 100 % tin

Terminal Strength: 0.6 kg (1.32 lbs) for 30 s

FEATURES

- High reliability
- Surface mountable
- Reflow or wave solderable
- Tape and reel packaging per EIA specifications: 4000 pieces on 7" reel
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COM PLIANT

Beam Strength: 1.0 kg (2.20 lbs)

Flex: 0.0788" [2.0 mm] minimum mounted on 0.063" [1.6 mm] thick PC board

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: - 55 °C to + 125 °C

Thermal Shock: 100 cycles, - 40 °C to + 85 °C


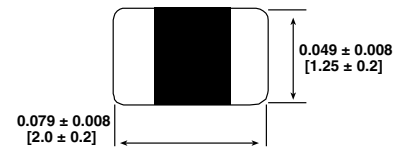
Humidity: + 40 °C, 85 % RH, 1000 h at full rated current

Load Life: 85 °C for 1000 h full rated current

STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	INDUCTANCE (nH)	TOL.	Q (MIN.)	TEST FREQUENCY (MHz)	Q (TYPICAL)			DCR MAX. (Ω)	SRF (MHz)		MAX. RATED CURRENT (mA)
					100 MHz	500 MHz	1000 MHz		MIN.	TYP	
ILC0805ER1N5S	1.5	± 0.3 nH	10	100	16	43	67	0.10	4000	7000	300
ILC0805ER1N8S	1.8	± 0.3 nH	10	100	16	56	59	0.10	4000	7000	300
ILC0805ER2N2S	2.2	± 0.3 nH	10	100	16	40	58	0.10	4000	7000	300
ILC0805ER2N7S	2.7	± 0.3 nH	12	100	16	43	60	0.10	4000	6500	300
ILC0805ER3N3S	3.3	± 0.3 nH	12	100	19	52	70	0.13	4000	5500	300
ILC0805ER3N9S	3.9	± 0.3 nH	12	100	19	52	75	0.15	3000	4400	300
ILC0805ER4N7S	4.7	± 0.3 nH	12	100	19	53	70	0.20	3000	3500	300
ILC0805ER5N6S	5.6	± 0.3 nH	15	100	19	53	70	0.23	3000	3500	300
ILC0805ER6N8J	6.8	± 5 %	15	100	19	44	60	0.25	2500	3300	300
ILC0805ER8N2J	8.2	± 5 %	15	100	19	45	60	0.28	2000	2600	300
ILC0805ER10NJ	10	± 5 %	15	100	20	53	60	0.30	3000	2300	300
ILC0805ER12NJ	12	± 5 %	15	100	20	36	45	0.35	1500	2000	300
ILC0805ER15NJ	15	± 5 %	15	100	20	46	45	0.40	1500	1800	300
ILC0805ER18NJ	18	± 5 %	15	100	20	52	45	0.45	1300	1700	300
ILC0805ER22NJ	22	± 5 %	18	100	20	40	31	0.50	1200	1400	300
ILC0805ER27NJ	27	± 5 %	18	100	20	44	29	0.55	1000	1300	300
ILC0805ER33NJ	33	± 5 %	18	100	20	36	15	0.60	1000	1200	300
ILC0805ER39NJ	39	± 5 %	18	100	20	36	12	0.65	800	1100	300
ILC0805ER47NJ	47	± 5 %	18	100	21	33	12	0.70	800	1000	300
ILC0805ER56NJ	56	± 5 %	18	100	21	31	9	0.75	700	900	300
ILC0805ER68NJ	68	± 5 %	18	100	21	30	-	0.80	600	800	300
ILC0805ER82NJ	82	± 5 %	18	100	22	26	-	0.90	500	700	300
ILC0805ERR10J	100	± 5 %	18	100	22	22	-	0.90	500	700	300
ILC0805ERR12J	120	± 5 %	13	50	22	17	-	0.95	400	600	300
ILC0805ERR15J	150	± 5 %	13	50	22	9	-	1.00	300	600	300
ILC0805ERR18J	180	± 5 %	13	50	21	8	-	1.10	300	500	300
ILC0805ERR22J	220	± 5 %	12	50	20	4	-	1.20	300	500	300
ILC0805ERR27J	270	± 5 %	12	50	24	17	-	1.30	200	400	300
ILC0805ERR33J	330	± 5 %	12	50	24	-	-	1.50	200	380	300
ILC0805ERR39J	390	± 5 %	12	50	24	-	-	1.50	200	300	300
ILC0805ERR47J	470	± 5 %	10	50	24	-	-	1.50	200	290	300

DIMENSIONS in inches [millimeters]

	
---	--

DESCRIPTION

ILC-0805 MODEL	10 nH INDUCTANCE VALUE	± 10 % INDUCTANCE TOLERANCE	ER PACKAGE CODE	e3 JEDEC LEAD (Pb)-FREE STANDARD
-------------------	------------------------------	-----------------------------------	-----------------------	--

GLOBAL PART NUMBER

I	L	C	0	8	0	5	E	R	1	0	N	K
PRODUCT FAMILY			SIZE				PACKAGE CODE		INDUCTANCE VALUE			TOL.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.